


# Robust valves for challenging environments

## VUVS Individual Valve Range

Your first choice for simple, cost-effective pneumatic control

**Individual valves VUVS** – flexible, modern, robust and durable quality. For up to 100% more flow with higher energy density. Proven technologies and materials. Comprehensive range of accessories. Numerous mounting options and easy operation. That is what today's valves should be!

# FESTO

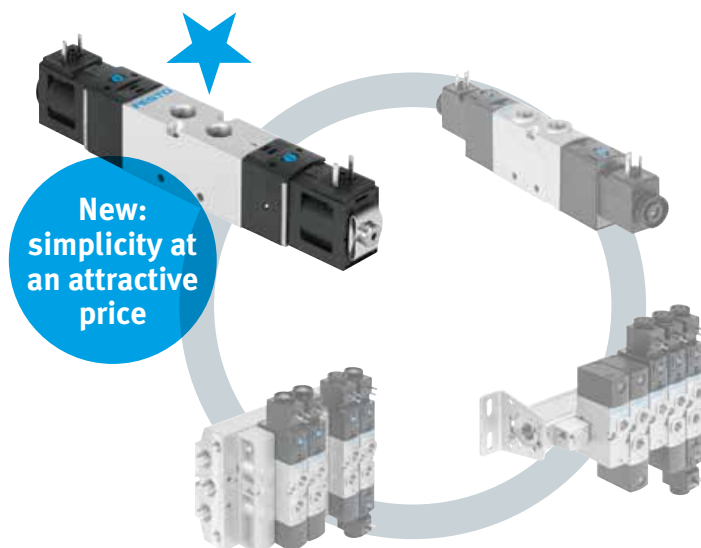

- Highlights**
- Attractive price
  - Robust design
  - Festo quality
  - High flow rate
  - 24 hour delivery
  - Pressure range up to 8 bar
  - IP65 rated with socket
  - ...many more variants with additional features available

### Ordering data of core range

VUVS-LK...-S					
In-line individual valve; internal pilot air supply; manual override; operating voltage 24V DC					
Port 2, 4	Width (mm)	3/2-way valve; NC; pneumatic spring	5/2-way valve; single solenoid; pneumatic spring	5/2-way valve; double solenoid	5/3-way valve; centre closed
1/8	20	★ 8043213	★ 8043214	★ 8043215	★ 575268
1/4	25	★ 8043217	★ 8043218	★ 8043219	★ 575525
	Angled socket; screw terminal	Type C, to fit 1/8 valve		★ 151687	
		Type B, to fit 1/4 valve		★ 34431	

Global availability, in stock, 24 hour delivery


# Compact valves for machine automation

## VUVG Individual Valve Range

Your first choice for simple, cost-effective pneumatic control

**Individual valves VUVG** – for more power from a smaller design!

Price attractive, impressive and installed in a flash. Perfect for all high-speed applications requiring a particularly high flow combined with a compact size, e.g. in small parts assembly and electronics industry or in the food and packaging industry.

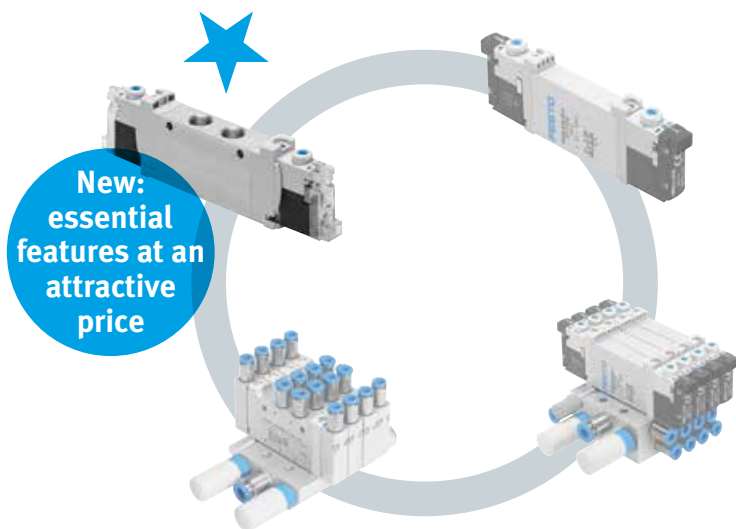

### Highlights

- Attractive price
- Compact design
- Festo quality
- High flow rate
- 24 hour delivery
- Pressure range up to 8 bar
- IP65 rated (M8)
- ...many more variants with additional features available

### Ordering data of core range

#### VUVG-LK...-S

**In-line individual valve; internal pilot air supply; manual override; operating voltage 24V DC; LED display**

Port 2, 4	Width (mm)	2 x 3/2 way valve NC; pneumatic spring		5/2 way valve; single solenoid; pneumatic spring		5/2 way valve; double solenoid	
M5	10	★ 8042538	★ 8042542	★ 8042539	★ 8042543	★ 8042540	★ 8042544
M7	10	★ 8042546	★ 8042550	★ 8042547	★ 8042551	★ 8042548	★ 8042552
G <sup>1</sup> / <sub>8</sub>	14	★ 8042562	★ 8042566	★ 8042563	★ 8042567	★ 8042564	★ 8042568

	Plug cable with sheath to open end, 2.5 m length. To fit:	★ 566660
	M8 cable, 3 pin to open end, 2.5 m length. To fit:	★ 541338

Global availability, in stock, 24 hour delivery